



Forensic FE study of skull fracture

Mikkelsen, Lars Pilgaard; Sölvadóttir, A.E.; Thomsen, H.R.; Lynnerup, N.; Jacobsen, C.

Publication date:
2009

[Link back to DTU Orbit](#)

Citation (APA):

Mikkelsen, L. P., Sölvadóttir, A. E., Thomsen, H. R., Lynnerup, N., & Jacobsen, C. (2009). *Forensic FE study of skull fracture*. Poster session presented at Stiftende generalforsamling og første årsmøde i Dansk Biomekanisk Selskab, Göteborg (SE), 17-18 Sep..

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal


If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Forensic FE-Study of Skull Fracture


L.P. Mikkelsen, A.E. Sölvadóttir^{*)} and H. R. Thomsen^{*)}, Materials Research Division, Risø DTU, Roskilde
N. Lynnerup, C. Jacobsen, Department of Forensic Medicine, University of Copenhagen

^{*)}Now at Novo Nordisk A/S, Hillerød


An important issue in forensic medicine is to determine how a specific skull fracture arose. This information can be critical for establishing if a criminal offense has taken place. Based on CT-scan of an autopsy case, a full 3-D finite element model of a skull was built up in the commercial dynamic finite element code Abaqus/Explicit. The skull was exposed to a short dynamic impact from a blunt object and a simple element-removing algorithm describing the fracture process in the finite element model was used. Based on the simulations, a large sensitivity of the fracture modes was found even for small changes in the initial speed of the incoming object.

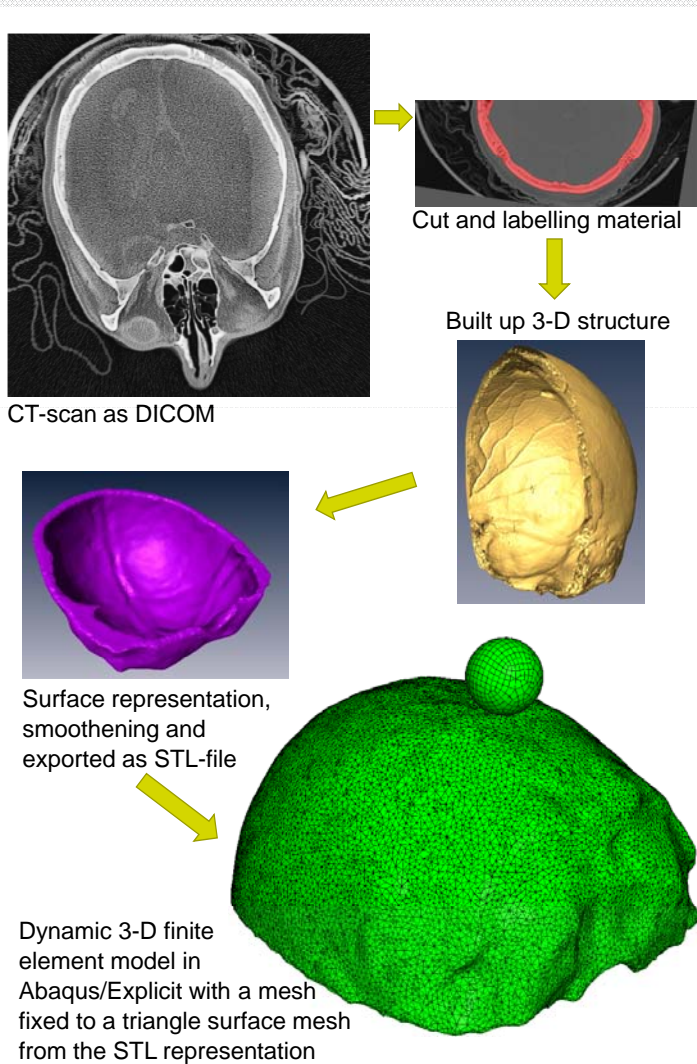

Dependency on speed of incoming object

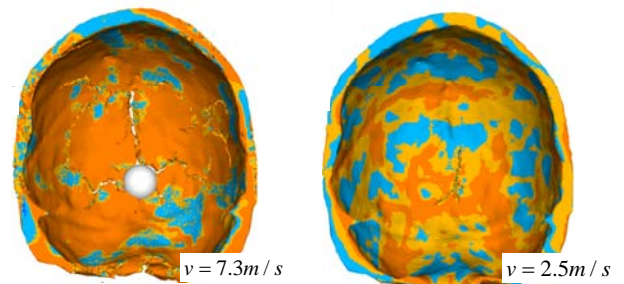

Predicted and observed crack pattern

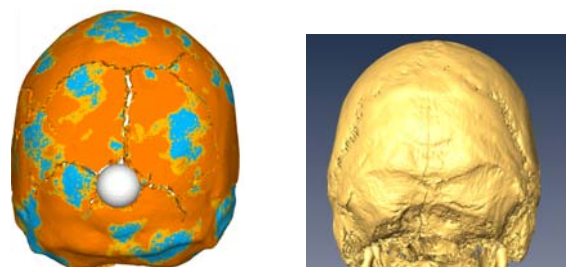

Conclusion

The predicted and observed fracture patterns differ from each other for the specific case. This may be due to some of the simplifications used in the model as well as the representation of the actual dynamic impact. A more realistic finite element model should take into account the real cranial vault structure, incorporating a spongy bone layer with a low density between two compact bone layers. In addition, the effects of the sutures between the single cranial bones should be included, as well as a more realistic dynamic fracture process simulation.